


ÖLFLEX® SERVO 719 CY

Screened, low capacitive servo cable with PVC outer sheath for static use - certified for North America

ÖLFLEX® SERVO 719 CY - Screened, low capacitive servo cable for fixed installation or occasional flexing with UL/cUL AWM certification

Info

Successor of ÖLFLEX® SERVO 700 CY and ÖLFLEX® SERVO 709 CY
 Low-capacitance design
 Product range extension

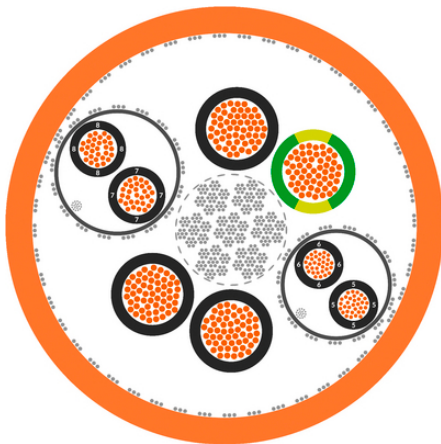

Oil-resistant



Interference signals

Benefits

Suitable for use with servomotor product lines from leading drive manufacturers
 Longer cable installation lengths thanks to low mutual capacitance cable design
 Multi-standard certification reduces part varieties and saves costs
 Space and weight-saving installations due to small cable diameters
 Copper braiding screens the cable against electromagnetic interference

Application range

Connecting cable between servo controller and motor
 For static and occasionally flexible use
 Plant engineering
 Industrial machinery and machine tools
 Printing machines

Product features

Low capacitance

Last Update (21.12.2023)

©2023 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

ÖLFLEX® SERVO 719 CY

Flammability:
UL/CSA: VW-1, FT1
IEC/EN: 60332-1-2
Oil-resistant
EMC-compliant

Norm references / Approvals

USA: UL AWM Style 2570
Canada: cUL AWM Style I/II A/B FT1
UL File No. E63634

Product Make-up

Fine-wire, bare copper conductor
Core insulation: polypropylene (PP)
Individual design depending on the item:
Power cores without or with one or two individually shielded control core pairs twisted together in short lay lengths;
Power cores with control core triplet twisted together in short lay lengths
Tinned copper screen braiding
PVC outer sheath, orange (RAL 2003)

Technical Data

Classification ETIM 5:	ETIM 5.0 Class-ID: EC000104 ETIM 5.0 Class-Description: Control cable
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000104 ETIM 6.0 Class-Description: Control cable
Core identification code:	Power cores: black with marking U/L1/C/L+; V/L2; W/L3/D /L-; GN/YE protective conductor Single-paired versions: individual design depending on the item black; white or brown; white Double-paired versions: black with white numbers 5; 6; 7; 8 0.34 mm ² pairs: WH/BN/GN/YE Triplet: black with white numbers 1; 2; 3
Conductor stranding:	Fine wire according to VDE 0295 Class 5/ IEC 60228 Class 5
Minimum bending radius:	Occasional flexing: 15 x outer diameter Fixed installation: 6 x outer diameter
Nominal voltage:	Power cores and control cores: IEC U0/U: 600/1000 V UL & CSA: 1000 V
Test voltage:	Core/Core: 4 kV Core/Screen: 4 kV
Protective conductor:	G = with GN-YE protective conductor
Temperature range:	Occasional flexing: -5°C to +70°C (UL: +80°C) Fixed installation: -40°C to +80°C

Note

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.

Copper price basis: EUR 150/100 kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges.

Last Update (21.12.2023)

©2023 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

ÖLFLEX® SERVO 719 CY

Please find our standard lengths at: www.lappkabel.de/en/cable-standardlengths

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

ÖLFLEX® SERVO 719 CY

Article number	Number of cores and mm ² per conductor	Outer diameter (mm) approx.	Copper index (kg/km)	Weight (kg/km)
ÖLFLEX® SERVO 719 CY				
1020010	4 G 1,5	8.4	83	130
1020011	4 G 2,5	9.9	125	190
1020012	4 G 4	11.7	191	273
1020013	4 G 6	13.7	290	394
1020014	4 G 10	16.7	452	581
1020015	4 G 16	20.1	721	884
1020016	4 G 25	24.3	1100	1348
1020017	4 G 35	27.7	1548	1840
1020018	4 G 50	33.7	2151	2645
1020040	4 G 0,75 + (2 x 0,5)	8.9	78	159
1020041	4 G 1 + (2 x 0,5)	9.3	88	147
1020044	4 G 1 + (2 x 1,0)	10.2	107	204
1020042	4 G 1,5 + (2 x 0,5)	10.3	111	180
1020045	4 G 1,5 + (2 x 1,0)	10.8	130	230
1020053	4 G 1,5 + (3 x 1,0)	11.5	145	225
1020019	4 G 1,5 + (2 x 1,5)	11.5	146	242
1020043	4 G 2,5 + (2 x 0,5)	11.7	158	247
1020046	4 G 2,5 + (2 x 1,0)	12.1	173	293
1020054	4 G 2,5 + (3 x 1,0)	12.9	188	290
1020020	4 G 2,5 + (2 x 1,5)	12.9	189	306
1020047	4 G 4 + (2 x 1,0)	14.3	250	373
1020055	4 G 4 + (3 x 1,0)	14.8	270	402
1020021	4 G 4 + (2 x 1,5)	15	271	420
1020048	4 G 6 + (2 x 1,0)	16.0	334	485
1020022	4 G 6 + (2 x 1,5)	17	351	529
1020056	4 G 6 + (3 x 1,5)	17.0	370	537
1020049	4 G 10 + (2 x 1,0)	18.8	526	712
1020023	4 G 10 + (2 x 1,5)	19.5	540	752
1020057	4 G 10 + (3 x 1,5)	19.5	559	758
1020050	4 G 16 + (2 x 1,0)	22.3	772	991
1020051	4 G 16 + (2 x 1,5)	22.5	785.2	999
1020058	4 G 16 + (3 x 1,5)	23.0	805	1151
1020052	4 G 25 + (2 x 1,5)	26.1	1,184.9	1459

Last Update (21.12.2023)

©2023 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03_16

ÖLFLEX® SERVO 719 CY

Article number	Number of cores and mm ² per conductor	Outer diameter (mm) approx.	Copper index (kg/km)	Weight (kg/km)
1020059	4 G 35 + (2 x 1,5)	30.4	1,598.1	1971
1020085	4 G 50 + (2 x 1,5)	34.0	2,205.2	2713
1020024	4 G 0,75 + 2 x (2 x 0,34)	9.7	99	163
1020035	4 G 1 + 2 x (2 x 0,75)	11.3	126.4	207
1020025	4 G 1,5 + 2 x (2 x 0,75)	12.3	150	245
1020026	4 G 2,5 + 2 x (2 x 1,0)	14.7	223	357
1020027	4 G 4 + 2 x (2 x 1,0)	16.4	288	452
1020028	4 G 4 + (2 x 1,0) + (2 x 1,5)	16.6	307	469
1020029	4 G 6 + (2 x 1,0) + (2 x 1,5)	18.5	421	617
1020030	4 G 10 + (2 x 1,0) + (2 x 1,5)	22.1	588	852
1020031	4 G 16 + 2 x (2 x 1,5)	25	876	1162
1020032	4 G 25 + 2 x (2 x 1,5)	28.7	1227	1590
1020033	4 G 35 + 2 x (2 x 1,5)	30.6	1652	2023
1020034	4 G 50 + 2 x (2 x 2,5)	37	2264	2876

Last Update (21.12.2023)

©2023 Lapp Group - Technical changes reserved

Product Management www.lappkabel.deYou can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03_16